

DATA SHEET |

TUNDRA

O-GASR

Steer Regional




T +44 (0)1452 234 088

Σ hello@ogatityres.com

OGATITYRES.COM




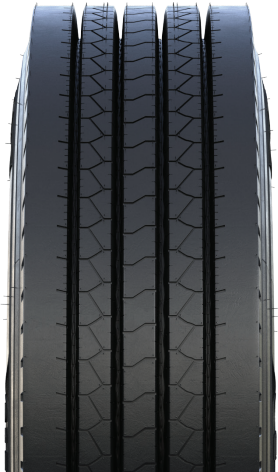

TUNDRA O-GASR

Steer Regional

Engineered for exceptional stability and precise steering, the O-GASR is built to last. Featuring a robust compound and a 15mm tread depth, it delivers reliable performance mile after mile.



SIZE	L/S INDEX	3PMSF	M + S	(PR)	FUEL EFFICIENCY	WET GRIP	NOISE CLASS	EPREL NO.	OVERALL DIAMETER	SECTION WIDTH	TREAD DEPTH	TREAD WIDTH	RIM WIDTH	MAX LOAD SINGLE	MAX LOAD DUAL	PRESSURE (KPA)	PRESSURE (PSI)
295/60R22.5	150/147K (149/146L)	■	■	16	C	A	73B	2389721	921.4 mm	295 mm	15 mm	250 mm	9.00 "	3350 kg / 7390 lbs	3075 kg / 6780 lbs	900	130
295/80R22.5	154/149M	■	■	18	C	A	73B	2389746	1045 mm	295 mm	15 mm	246 mm	9.00 "	3750 kg / 8270 lbs	3250 kg / 7160 lbs	850	123
315/60R22.5	154/150L (152/148M)	■	■	20	C	A	73B	2389773	942 mm	315 mm	14 mm	276 mm	9.75 "	3750 kg / 8270 lbs	3350 kg / 7390 lbs	900	130
315/70R22.5	156/150L	■	■	18	C	A	73B	2389734	1010 mm	315 mm	15 mm	256 mm	9.00 "	4000 kg / 8820 lbs	3350 kg / 7390 lbs	900	131
315/80R22.5	156/150L (154/150M)	■	■	20	C	A	73B	2389548	1074 mm	315 mm	15 mm	256	9.00 "	4000 kg / 8820 lbs	3350 kg / 7390 lbs	850	123
385/55R22.5	160K (158L)	■	■	20	C	A	73B	2389677	994 mm	385 mm	16 mm	308	12.25 "	4500 kg / 9920 lbs	-	900	130
385/65R22.5	164K (158L)	■	■	20	C	A	73B	2389664	1072.2 mm	385 mm	16 mm	308	11.75 "	5000 kg / 11000 lbs	-	900	130



M+S